



ADJUSTABLE BALLET RACK


ITEM#:PSBBADJ

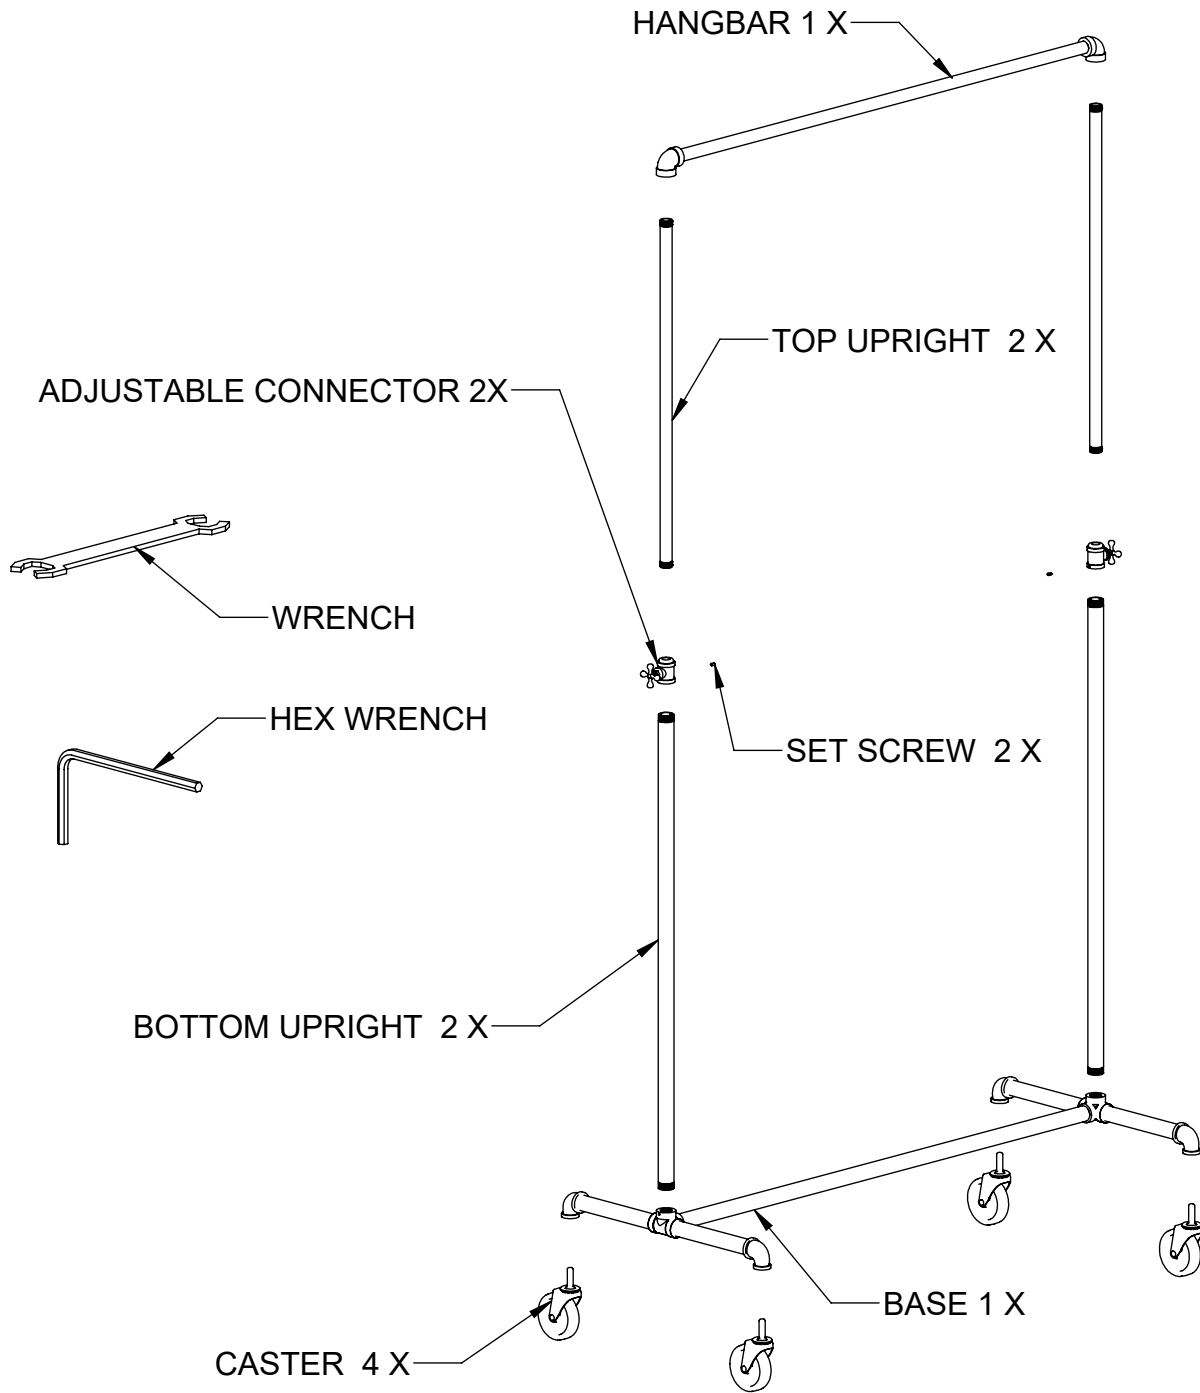

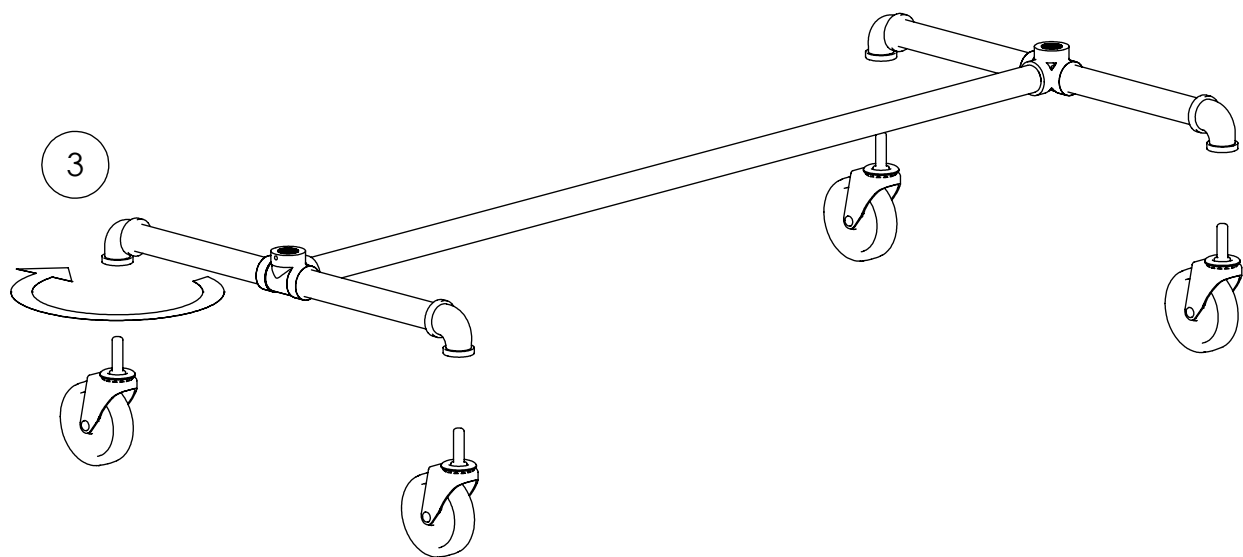

1

SCREW IN THE CASTERS TO THE BASE AS SHOWN USING PROVIDED WRENCH

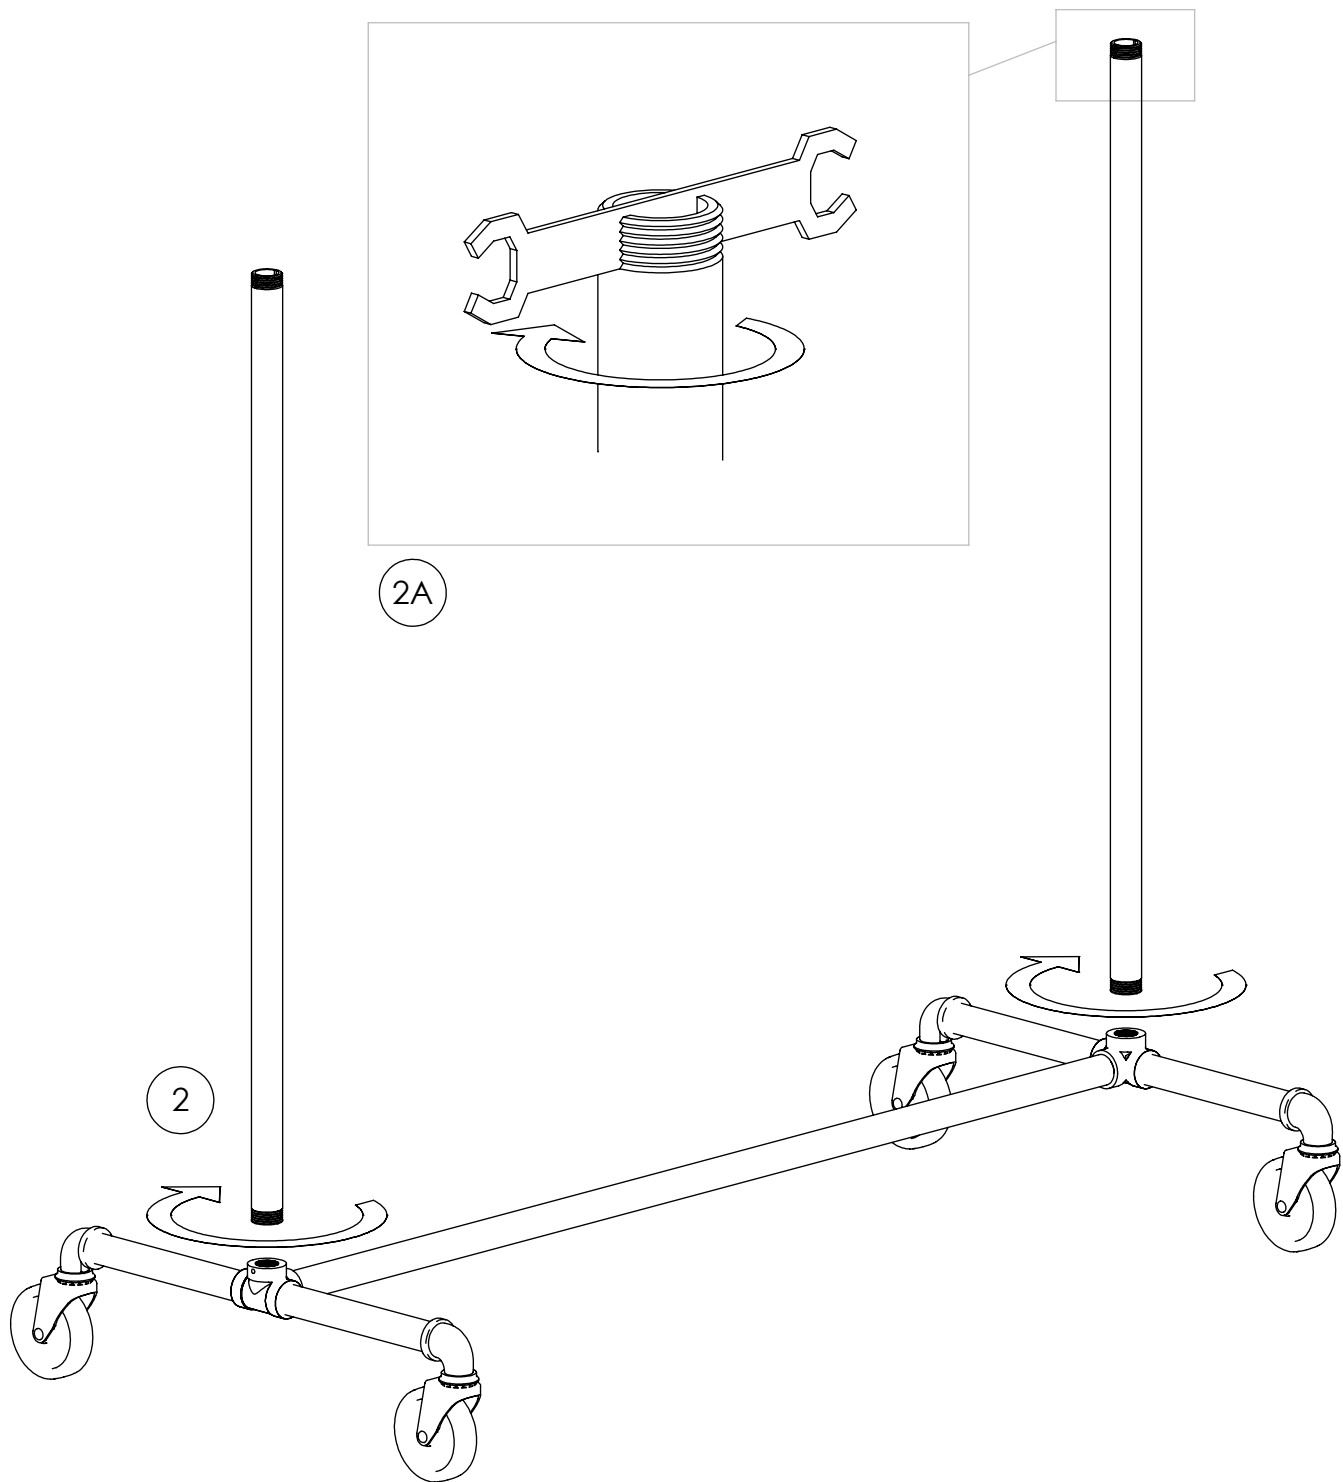


2



BY HAND, SCREW IN BOTTOM UPRIGHTS AS SHOWN


2A

TO FULLY TIGHTEN UPRIGHT, PLACE INCLUDED WRENCH INTO PIPE SLOTS AS SHOWN. TIGHTEN FULLY.

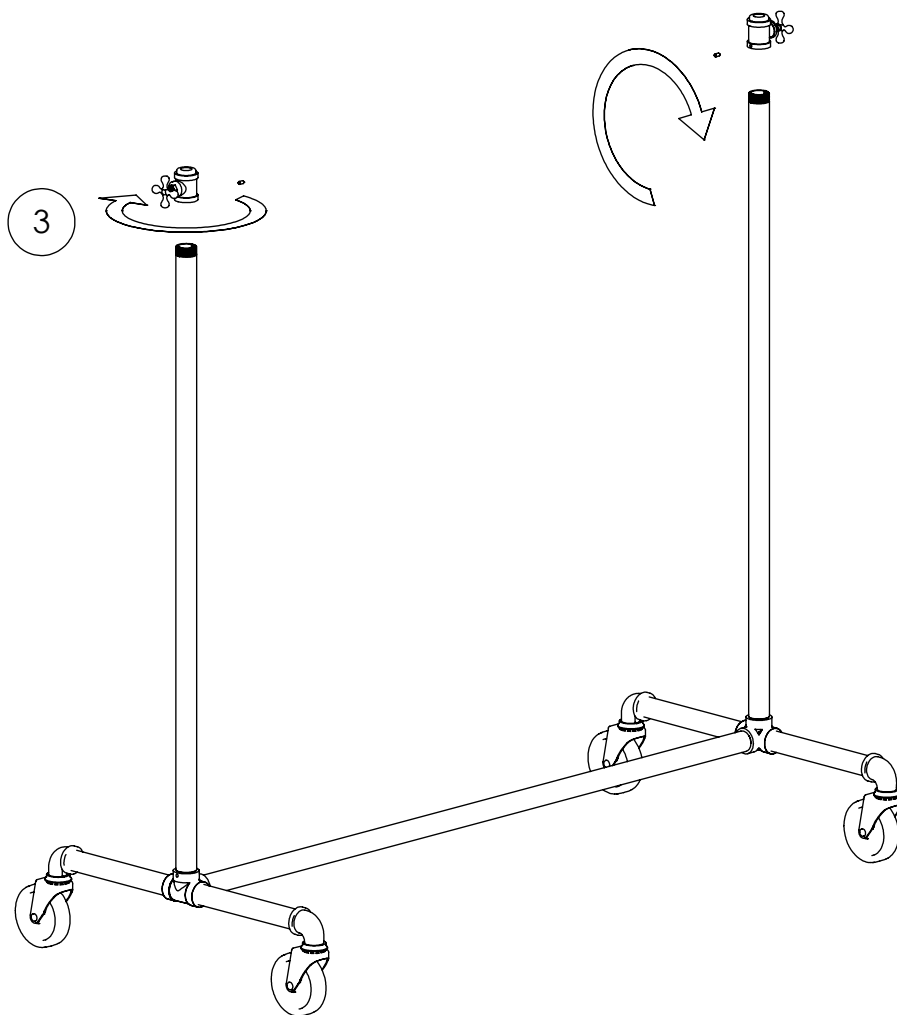


- 3 BY HAND, SCREW ADJUSTABLE CONNECTOR TO
BOTTOM UPRIGHTS SUFFICIENTLY &
THEN ADJUST SO THAT IT ALIGNS AS SHOWN BELOW
- 4 TIGHTEN SET SCREW USING HEX WRENCH TO LOCK
ADJUSTABLE CONNECTOR IN PLACE.

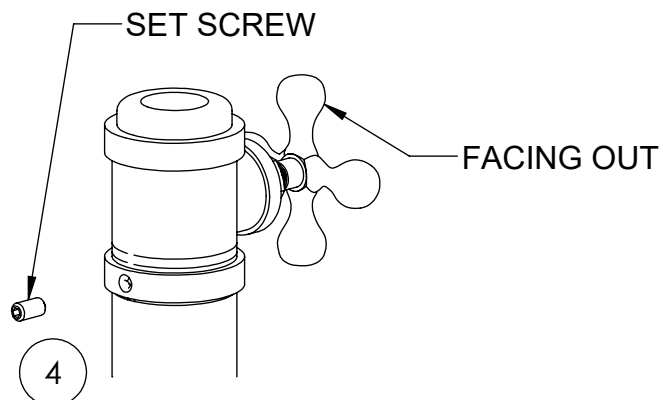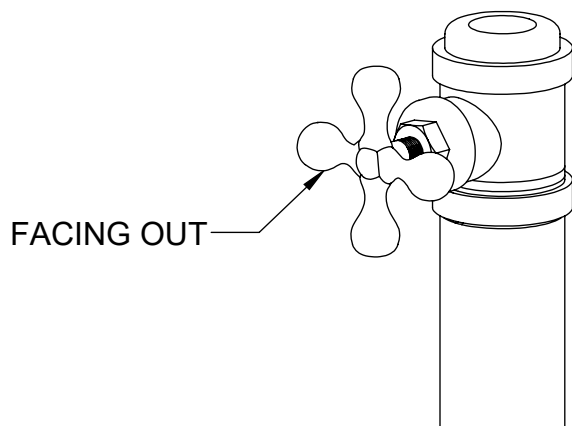

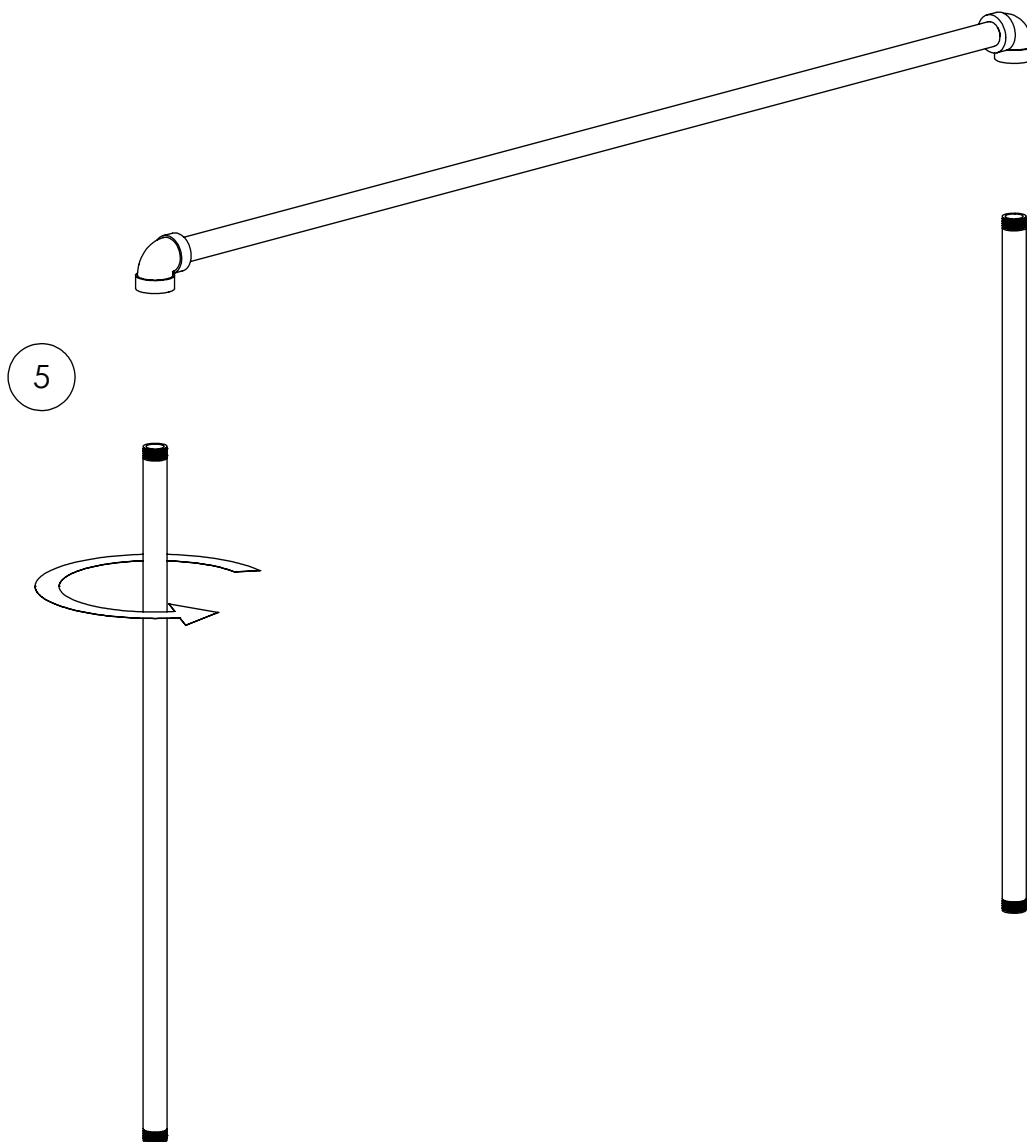

5 BY HAND, SCREW TOP UPRIGHTS TO HANGBAR AS SHOWN

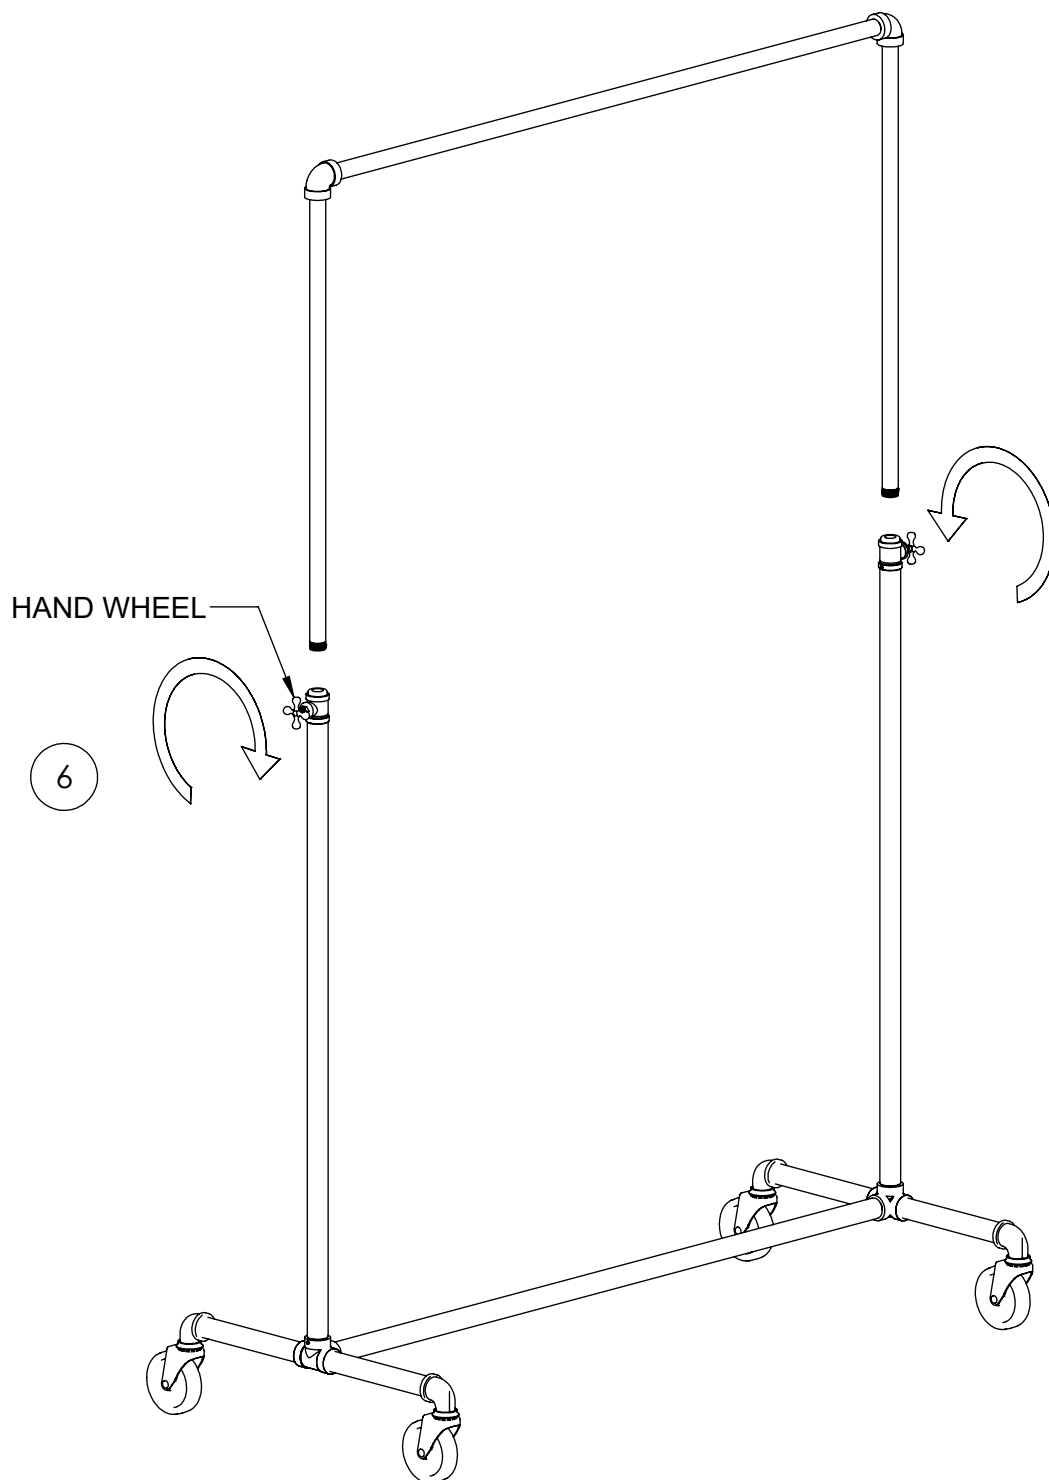

- 6 (UNTIGHTEN HAND WHEEL)
DROP HANGBAR ASSEMBLY FROM STEP 7 AS SHOWN AT DESIRED HEIGHT
& LOCK IN POSITION BY TIGHTENING THE HAND WHEEL.